BPM Gentle Plus



BPM Gentle Plus Double Rope Manipulators are designed for ergonomic, safe, and efficient material handling in industrial environments. The load is guided to the balancing unit via two independent steel ropes, enabling a weightless working experience.


Maximum Safety – Two independent steel ropes with separate braking systems Weightless Operation - Near-zero effort required from the operator Precise Positioning - Articulated arm with Double Rope guidance for full range of motion **Drift Control** - Special brakes ensure secure and stable load control Flexible Mounting - Can be installed on floor, ceiling, or rail systems **Gripper Options** – Standard hook or custom gripper solutions

Operates with dry, filtered (40µm), oil-free compressed air at min. 0.7/0.8 MPa Max. load capacity: 300 kg, max. working radius: 4.500 mm, vertical stroke: 2.000 mm

Air consumption per cycle: 50-150 NI

Mounting Options

Gentle Plus Column Mounted GPY

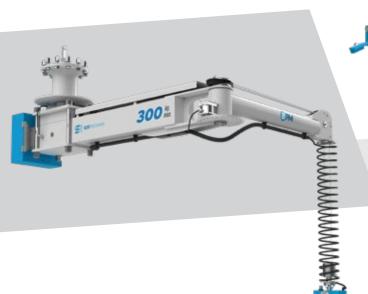






Maximum Load Capacity [kg] Max. Working Radius [mm] Rmax Min. Working Radius [mm] Rmin Vertical Stroke [mm] Н Min. Pick-up Height [mm] *h Max. Manipulator Height [mm] *Hmax Max. Ceiling Mounting Height [mm] *Hf Lower Edge of Main Body [mm] *Hmin

^{*} Dimensions may vary depending on customer-specific requirements.

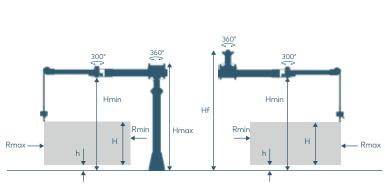

Base Plate Dimensions [mm] 500 250 250 8 x Ø 18



Tailor-made solutions

No matter what kind of load you need to handle with a BPM manipulator – we develop the right custom gripper for every application.

To ensure ergonomic, safe, and efficient material flow, we

To ensure ergonomic, safe, and efficient material flow, we manufacture **tailor-made gripping tools and custom constructions** precisely adapted to your requirements.

Whether vacuum-based, pneumatic, or magnetic, we engineer solutions that allow you to handle your loads safely and effortlessly.



























